




Product Data Sheet

Polymex Flex 75

Hollow Fiber UF Membrane Module

POLYMEX Flex 75 Series is an ultrafiltration module, used for production of process and potable water. Typical applications are the filtration of surface water, potable water and WWTP effluent. Mode of operation is feed-and-bleed with a minor crossflow or dead-end mode with regular backwash (permeate only) and chemically enhanced backwash.

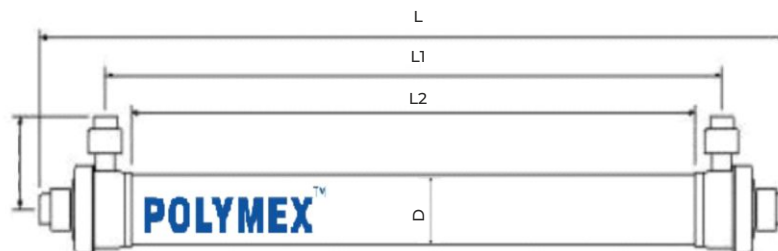

Product Dimensions & Specification

Model	Length L, L1 inch (mm)	Length L2, L3 Inch(mm)	Diameter D Inch(mm)	Width W1, W2	Effective Membrane Area, ft ² (m ²)	Flow Configuration (1.5 Kg/cm ² , 25°C)	Flow L/H (1.5 Kg/cm ² , 25°C)
Flex 75	74.84(1901)	68.42(1738)	60.51(1537.5)	8.66(200)	807(75)	Inside Out	3750 - 9000

Filtration Performance

Ingredient	Effect
SS, Particles > 1µm	Removal Rate = 99%
SDI	≤ 3
Bacteria, Viruses	> 4 log
Turbidity	< 1NTU
TOC	Removal Rate: 0-25%

Technical Parameters

Ingredient	Effect
Filtering Type	Inside-Out
Membrane Material	PES
MWCO	100K Dalton
Membrane Area	75m ² (807 ft ²)

Product Highlights

- Drinking water treatment of tap water, surface water, well water and river water.
- Pre-treatment for RO.
- High strength, hollow fibre membranes
- Treatment, recycle and reuse of industrial waste water.
- Moderate removal rate of organic matters with High flux.

Application Data

Operating Flux	50-120L/m ² .hr (1.5 Kg/cm ² , 25°C)
Backwash Flux	100-200L/m ² .hr (1.5 Kg/cm ² , 25°C)
Suggested Working Pressure	≤ 3.0 Kg/cm ²
Maximum Transmembrane Pressure	3.0 Kg/cm ²
Maximum Backwashing Pressure	3.0 Kg/cm ²
Air Washing Volume	0.1-0.15N m ³ /m ² .hr
Air Washing Pressure	≤ 1.0 Kg/cm ²
Maximum Working Temperature	35°C
PH Range	Working: 4-10; Washing: 2-12
Operating Mode	Cross Flow or Dead End

Operating Parameters

Backwashing Frequency	Every 30-60min.
Backwashing Duration	30-60s
CEB Frequency	0-4 times per day
CEB Duration	5-10min.
CIP Frequency	Every 1-3 months
Sterilization	15ppm Sodium Hypochlorite
Organic Pollution Washing	0.2% Sodium Hypochlorite + 0.1% Sodium Hydroxide
Inorganic Pollution Washing	1-2% Citric Acid/0.2% Hydrochloric Acid

*At the Inlet of this membrane <5 µm Filter should be Provided to prevent blockage of membrane by large particles in Feed Water.