




Product Data Sheet

Polymex Mx 40

Hollow Fiber UF Membrane Module

POLYMEX Mx Series Ultrafiltration module is made with hollow fiber PVDF which has good resistance to chemicals and high mechanical strength, it can be used to replace Hydranautics HYDRAcap MAX 40 UF membrane modules with better cost effectiveness. Hollow fiber UF module allows for larger loading capacity with same space, 0.08µm pore size contributes to good rejection to bacteria and virus, modified PVDF material has very good hydrophilic feature and less membrane fouling.

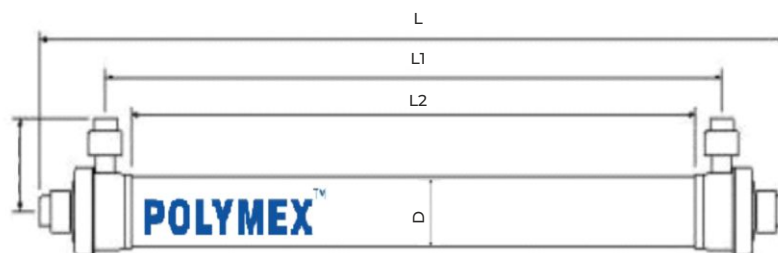

Product Dimensions & Specification

Model	Length L, L1 inch (mm)	Length L2, L3 inch (mm)	Diameter D inch (mm)	Width W1, W2	Effective Membrane Area, ft² (m²)	Flow Configuration (1.5 Kg/cm², 25°C)	Flow L/H (1.5 Kg/cm², 25°C)
Mx 40	1365.00	1257.30	1135.50	250	52(4.83)	Outside In	1,700 - 5,500

Filtration Performance

Ingredient	Effect
SS, Particles > 1µm	Removal Rate = 99%
SDI	≤ 3
Bacteria, Viruses	> 4 log
Turbidity	< 1NTU
TOC	Removal Rate: 0-25%

Technical Parameters

Ingredient	Effect
Filtering Type	Inside-Out
Membrane Material	PES
MWCO	100K Dalton
Membrane Area	80m² (861 ft²)

Product Highlights

- Drinking water treatment of tap water, surface water, well water and river water.
- Pre-treatment for RO.
- High strength, hollow fibre membranes
- Treatment, recycle and reuse of industrial waste water.
- Moderate removal rate of organic matters with High flux.

Application Data

Operating Flux	50-120L/m².hr (1.5 Kg/cm², 25°C)
Backwash Flux	100-200L/m².hr (1.5 Kg/cm², 25°C)
Suggested Working Pressure	≤ 3.0 Kg/cm²
Maximum Transmembrane Pressure	3.0 Kg/cm²
Maximum Backwashing Pressure	3.0 Kg/cm²
Air Washing Volume	0.1-0.15N m³/m².hr
Air Washing Pressure	≤ 1.0 Kg/cm²
Maximum Working Temperature	35°C
PH Range	Working: 4-10; Washing: 2-12
Operating Mode	Cross Flow or Dead End

Operating Parameters

Backwashing Frequency	Every 30-60min.
Backwashing Duration	30-60s
CEB Frequency	0-4 times per day
CEB Duration	5-10min.
CIP Frequency	Every 1-3 months
Sterilization	15ppm Sodium Hypochlorite
Organic Pollution Washing	0.2% Sodium Hypochlorite + 0.1% Sodium Hydroxide
Inorganic Pollution Washing	1-2% Citric Acid/0.2% Hydrochloric Acid

*At the Inlet of this membrane <5 µm Filter should be Provided to prevent blockage of membrane by large particles in Feed Water.